PORCELAIN VENEER PERFORMANCE DATA

	PHYSICAL PROPERTIES	TEST ASTM	STANDARD A137.1*	RESULTS
**	Water absorption *	C373	≤ 0.5%	COMPLY WITH ANSI A137.
99	DCOF Average dynamic coefficient of friction **	ANSI A.326.3	As reported	NOT APPLICABLE
~	Skid Resistance	DIN 51097	NOT APPLICABLE	NOT APPLICABLE
		DIN 51130		
[]	Resistance to freeze/thaw cycling *	C1026	As reported	RESISTANT
	Resistance to thermal shock	C484	As reported	RESISTANT
1	Warpage (edge)	C485	Warpage ± 0.4% or ± 0.05 in	COMPLY WITH ANSI A137.
1	Warpage (diagonal)	C485	Warpage ± 0.4% or ± 0.07 in	COMPLY WITH ANSI A137.
111	Wedging	C502	± 0.25% or ± 0.03 in	COMPLY WITH ANSI A137.
7	Chemical resistance	C650	As reported	UNAFFECTED
**	Resistance to stain	C1378	As reported	UNAFFECTED
¥	Thickness	C499	Range: 0.04 in	COMPLY WITH ANSI A137.
	Breaking strength	C648	250 lbf or greater	COMPLY WITH ANSI A137.

- * Average values referred to our production and related to the matt finish of the product.
- Be sure to use porcelain veneers belonging to the same caliber. - Test results are available on request.
- The information provided can be subject to change. Please refer to outdoor.landmarkceramics.com for the latest, most accurate and up-to-date information.
























LEARN MORE ABOUT





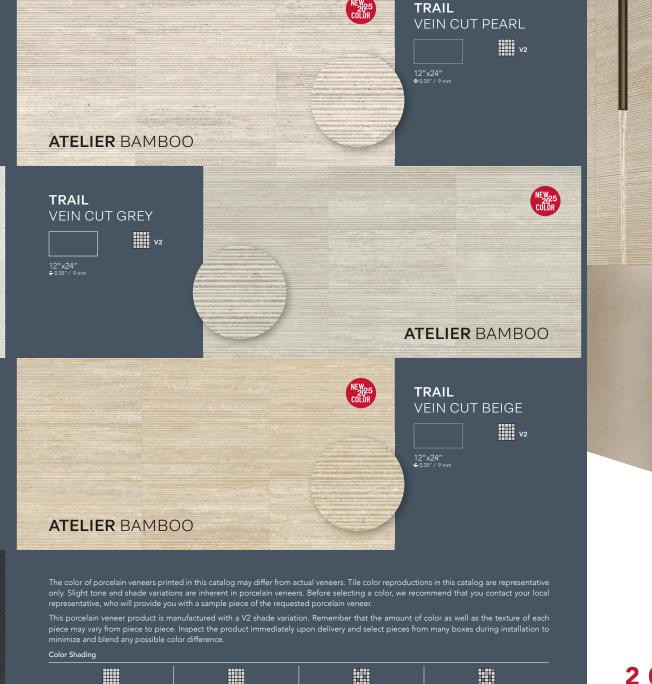





EDITION





